

To fix a cut or crack

A cut or crack can be fixed in a short time.

You need a curved needle and a synthetic thread, a scissors and silicone.

Check if your roof is 100% dry.

The best place for this job is a heated garage.

It better to open the roof about 1-2 inches to realse the tension.


It does not matter textile or PVC.

In this instruction you see the fix on a PVC roof.


Crack in the PVC roof (pic no1)



Use the needle to sew the crack. (pic no2)

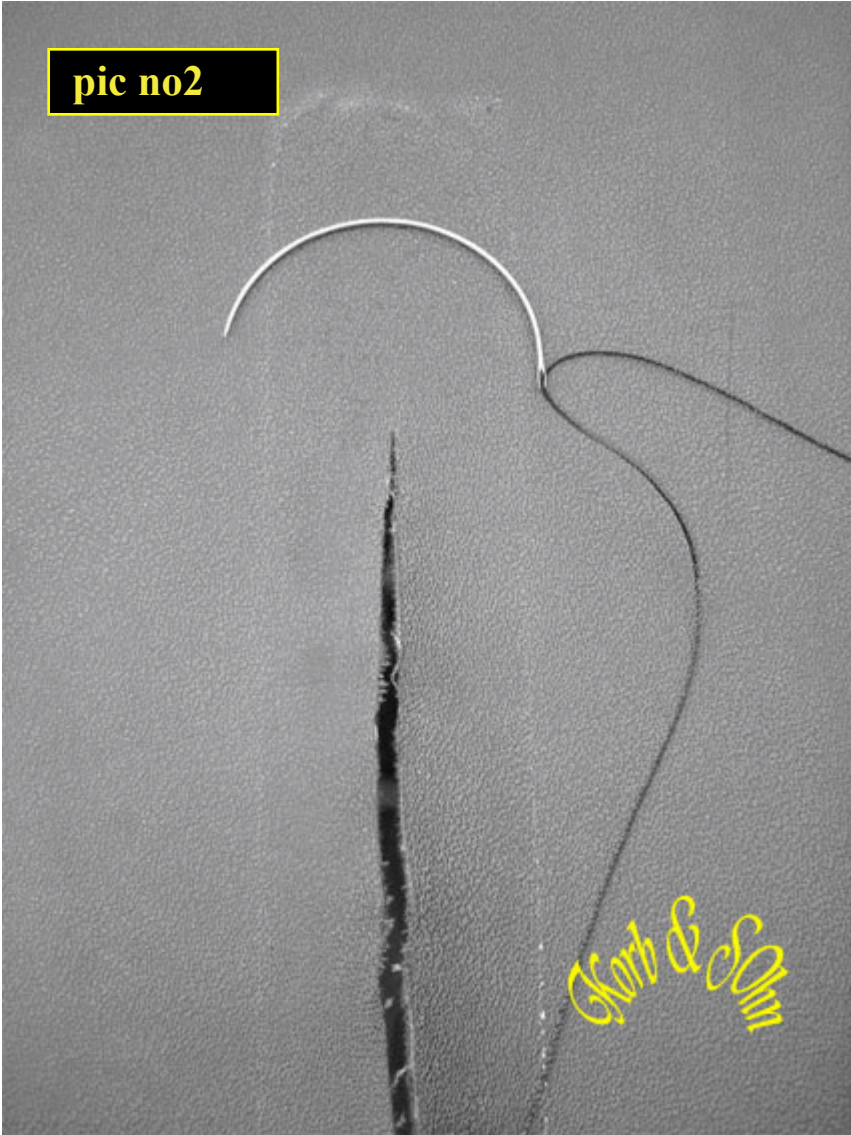


**Push the thread knot in the inside. Than sew from out to the inside. (like in previous instruction)
(pic no3)**

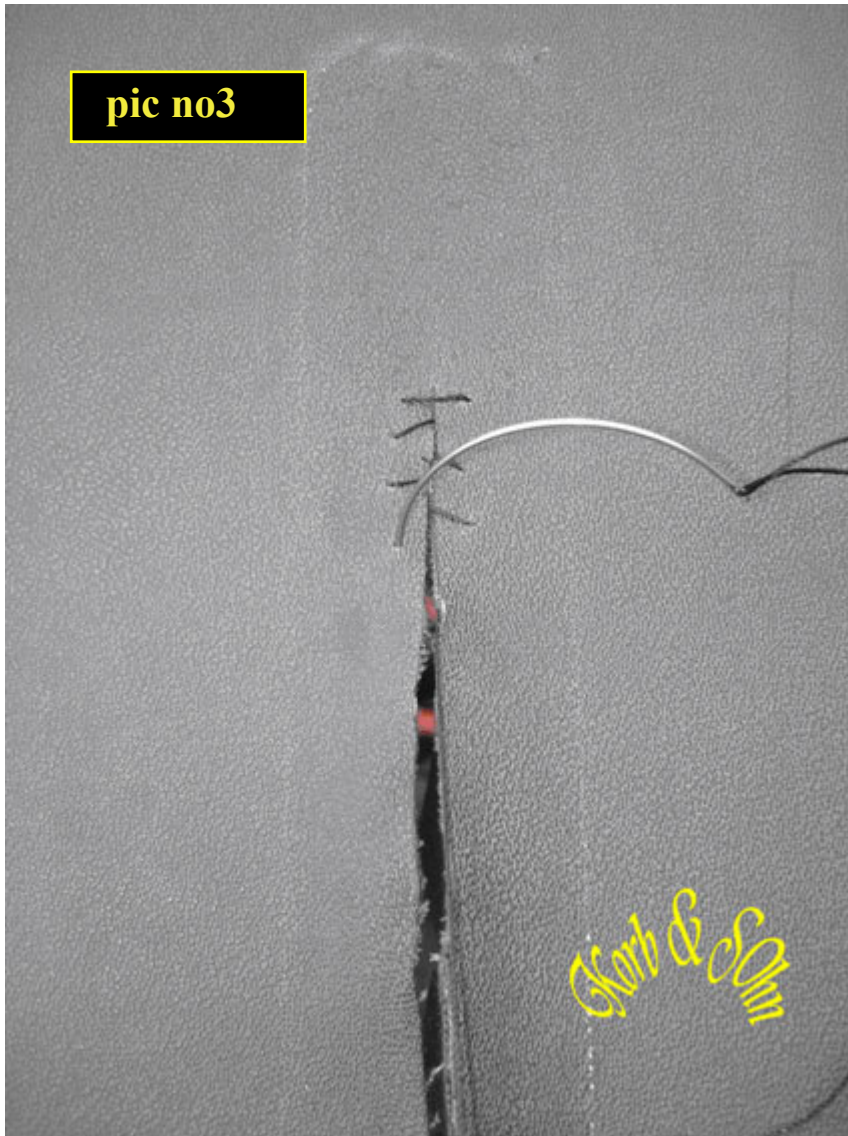


Retens always the thread.


pic no4

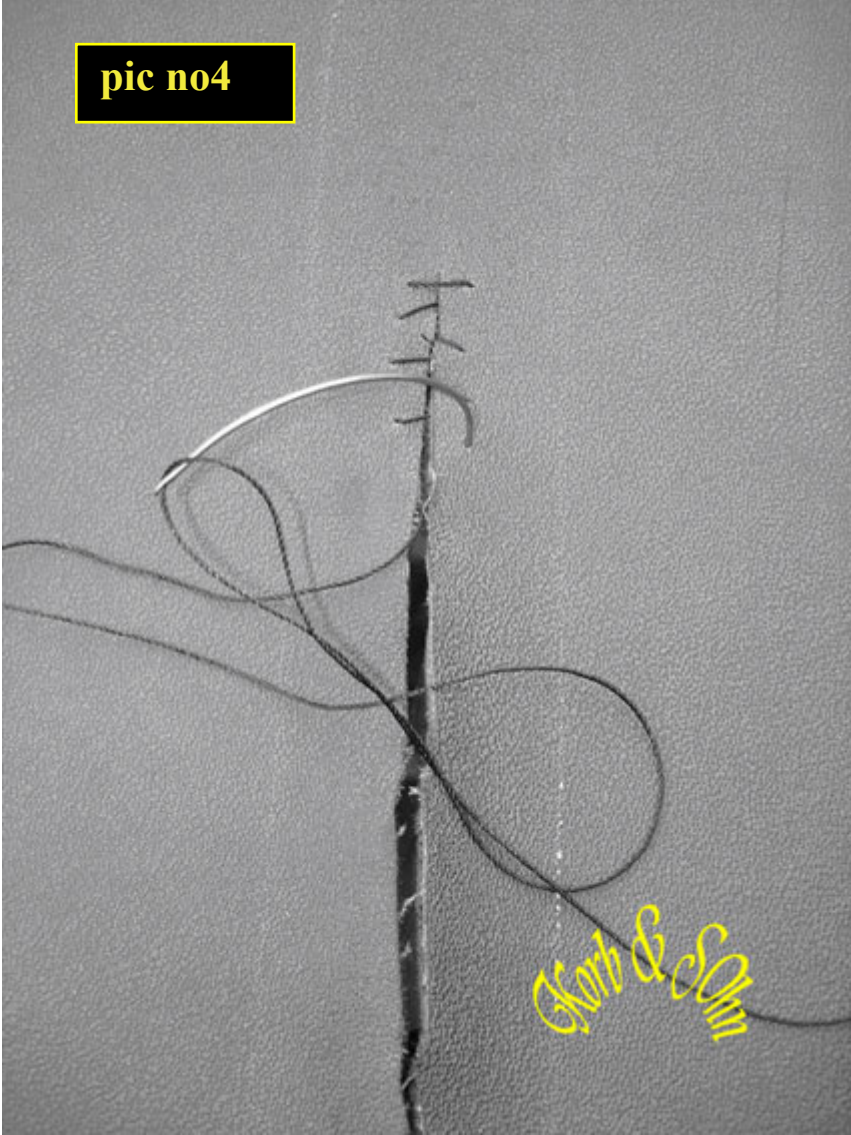


If you finish, it should look like this.

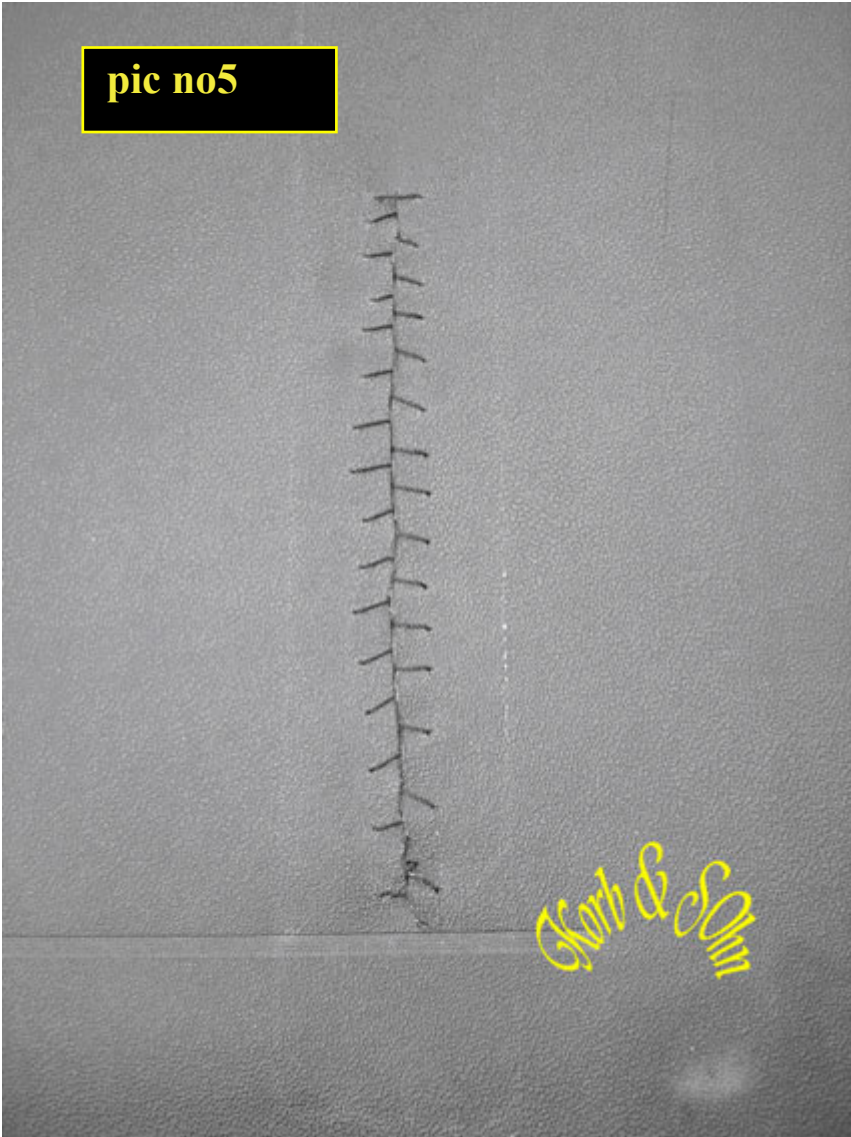


Clean the area around with benzine or similar.

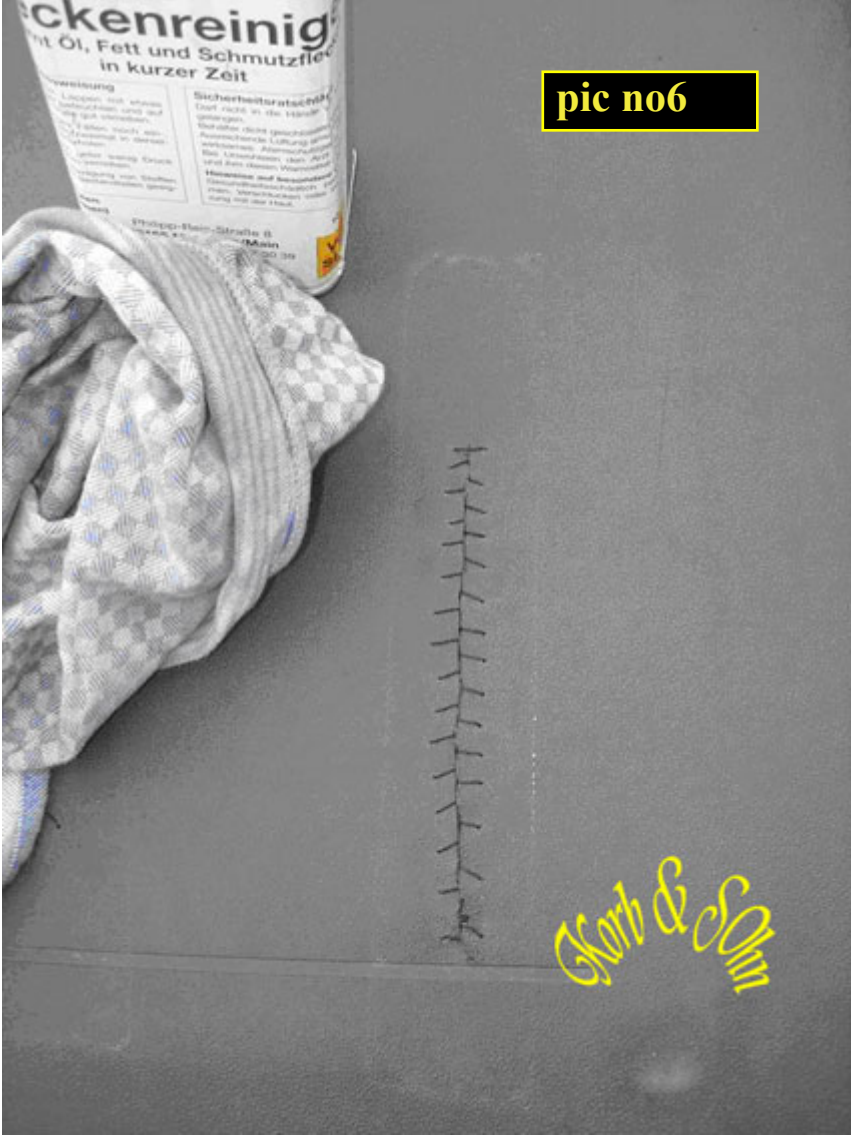

Now put on the silicone in thin stripes on the seam.

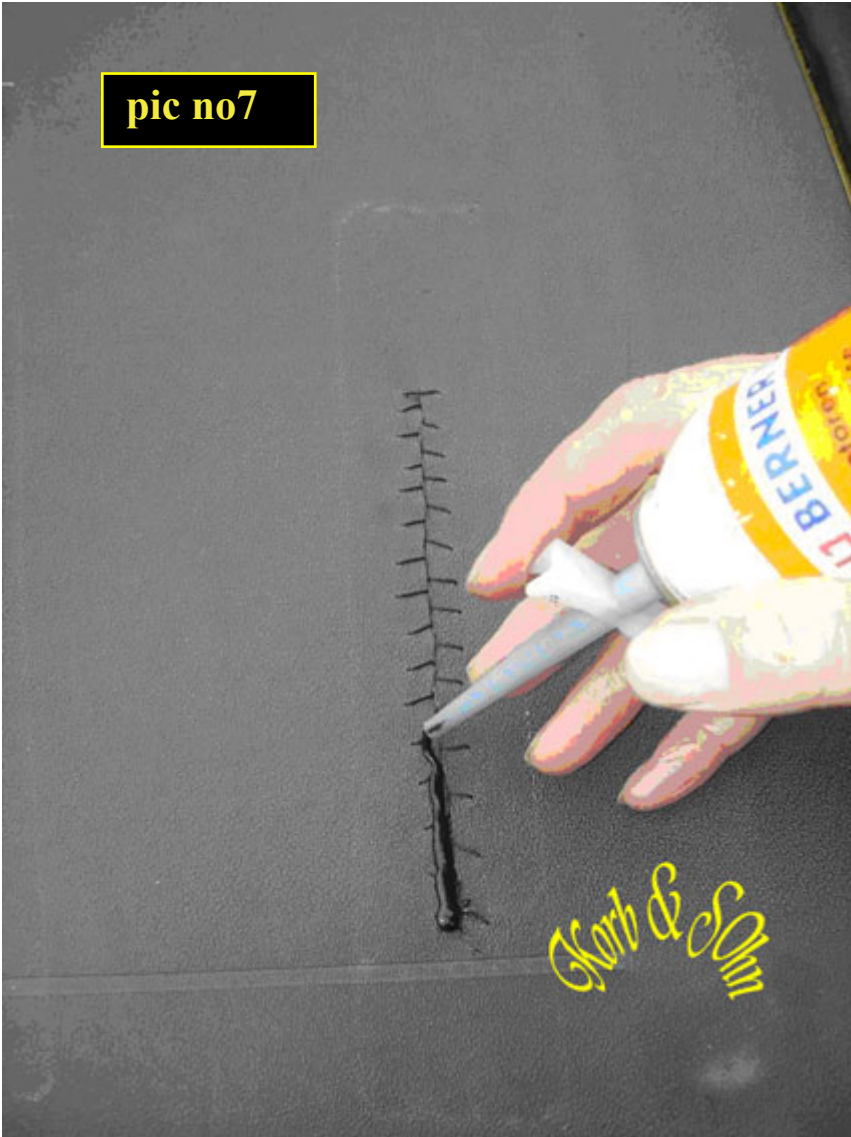

This is totally enough (pic no8)

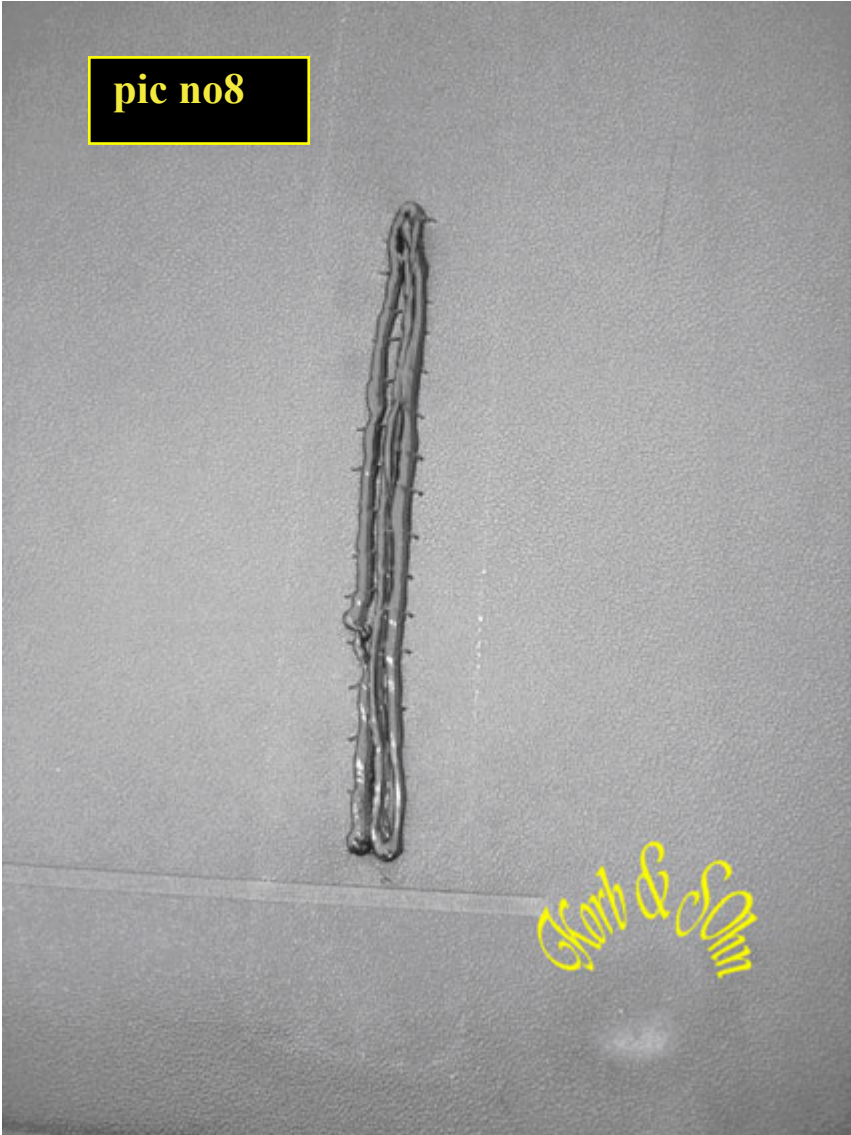

**Now smooth the silicone with wet fingers.
You can push a little harder to work in the silicone on the crack.
This way it will adhere better.**



The car should now be untouchable for 48 hours.

This is of course only a temporary solution represents.

For damages resulting from these can not assume liability.